


ALIGN™ TECHNOLOGY GRIP INSTALLATION GUIDE


Please follow this guide to ensure the alignment ridge is installed properly on your customer's clubs.

1

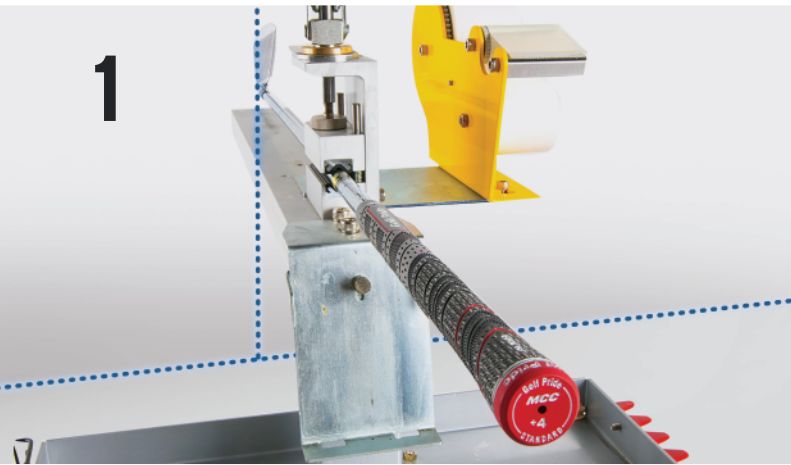

Make sure the clubface is square and perpendicular to the ground. Apply extra solvent to ensure the grip can be adjusted after installed to straighten ridge.

2

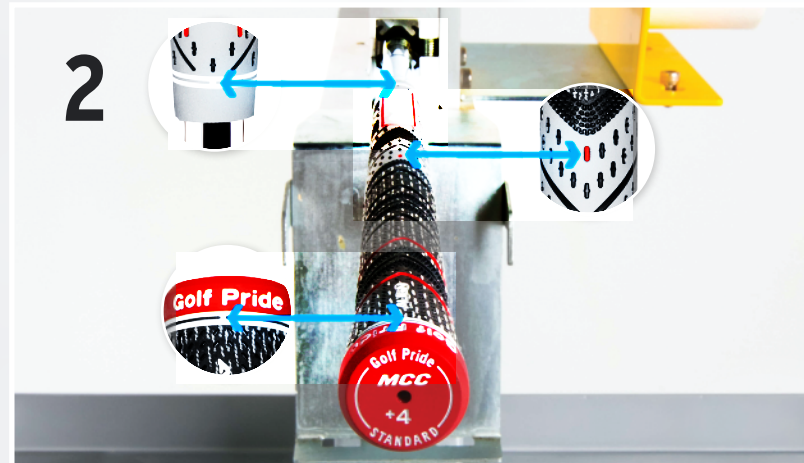

Install the grip ensuring the 3 front installation marks (end cap, middle, mouth) are linear and pointing to a perpendicular clubface.

*Double check that the clubface remained square during installation.

3



The ALIGN Technology is directly underneath the front installation marks. Once the grip is installed, unclamp the grip and turn the grip around to inspect the ALIGN Technology.

*Hold the club shaft securely when removing the club from vice and setting on the ground, as the grip can shift easily when additional solvent is used.

4



Adjust the grip as necessary to straighten the red ridge with the leading edge.